MAX

ENGINEERED FOR PERFORMANCE

TWINTIER®
RB443T

TIES WIRE MESH x WIRE MESH
UP TO #7 x #7 WITH 19GA. WIRE



THE FASTEST TWINTIER EVER!

MAX

ENGINEERED FOR PERFORMANCE

TWINTIER® RB443T

BENEFITS

NEW FASTER TYING
The RB443T tying speed was reduced to less than 1/2 second. **Approximately 40% faster than the RB441T.**

NEW LOAD ASSIST MECHANISM
New wire loading system automates wire loading for tool.

NEW EASY PULL TRIGGER
Reduced trigger effort is required, improving operational ergonomics.

BUILT TO LAST
The TWINTIER is built to last with durability that you can count on time and time again from MAX.

COST SAVINGS
The TWINTIER'S **Wire Pull-Back Mechanism** dispenses the precise amount of wire needed to form a tie, reducing wire usage.

TOOL SPECIFICATIONS

Weight	5.6 lbs
H x W x L	11½" x 4⅞" x 13"
Tying Speed	Less Than 1/2 Sec.
Tying Capacity	Wire Mesh x Wire Mesh to #7 x #7
Wire Series	TW1061T Series
Wire Diameter	19ga.
Ties Per Coil	Approx. 150 to 265 ties Wire Mesh x Wire Mesh, Approx. 300 ties
Ties Per Charge	Approx. 5000
Coils Per Box	30
Battery	JPL91450A
Charger	JC925A
Voltage	DC 14.4V
Recharge Time	80% Capacity - 60 minutes 100% Capacity - 80 minutes
Standard Equipment	Battery, Charger, Belt-Hook and Plastic Carrying Case

TW1061T TIE WIRE SERIES



19 ga. Steel Wire | 19 ga. Poly Coated Wire | 19 ga. Electro. Galv. Wire. | 19 ga. Buy America Wire

TW1061T-S- STAINLESS STEEL WIRE IS ALSO AVAILABLE AS A SPECIAL ORDER ITEM.

FEATURES

HOW THE WIRE FEED SUPPORT BUTTON WORKS

FACING FRONT | FACING BACK





50% LESS TRIGGER EFFORT THAN THE RB441T

1 CENTER MARKER
Easier to see and tie rebar cross section.

2 ENCLOSED DESIGN
Greater protection against debris and moisture entering the tool.

3 WIRE FEED SUPPORT
Helps the wire run smoothly to keep up with fast tying.

4 BELT HOOK
Hang the tool from your belt while not in use.

5 QUICKLY & EASILY LOAD TIE WIRE
Easily load the dual wire with new wire loading assist mechanism.

6 LIGHT TRIGGER
Short stroke trigger helps dispense the wire faster when trigger is pulled.

MULTIPLE REBAR COMBINATIONS

3 BARS



MINIMUM #3x#3x#3

MAXIMUM #7x#5x#5


4 BARS



MINIMUM #3x#3x#3x#3

MAXIMUM #5x#5x#4x#4

TIE WIRE BENDING MECHANISM MAKES A SHORTER TIE HEIGHT

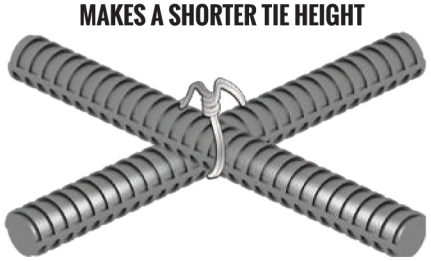

APPLICATIONS

Commercial Building, Foundations, Road Construction, Bridges, Precast Plants, Radiant Heating Tubes, Electrical Conduits, Tilt-up Construction, Pools, Basements, Sand Bags

MAX USA CORP.

205 Express St., Plainview, NY 11803
Phone: 800.223.4293 fax: 516.741.3272
www.maxusacorp.com

All MAX products are protected by registered patents and design rights including trademarks. For details, please contact MAX.

DEALER: