SLINGSHOT LLC
Phone: 304.375.2553
Fax: 304.375.2217
www.slingshotwholesale.com

COMPANY:_____ PHONE:_____
CONTACT:_____ FAX:_____
JOB NAME:_____ E-MAIL:_____

STEP 1 = FRAME - CIRCLE ONE OPTION IN EACH BOX

START

FRAME SIZE:

Width -X-	Height
2'0"- (24")	-6'8" (80")
2'4"- (28")	-7'0" (84")
2'6"- (30")	-7'2" (86")
2'8"- (32")	-7'10" (94")
3'0"- (36")	-8'0" (96")
3'4"- (40")	-10'0" (120")
3'6"- (42")	
4'0"- (48")	
5'0"- (60")	
6'0"- (72")	

Other:_____

MATERIAL:
- 16 GA (STANDARD)
- 16 GA GALV.
- 14 GA
- 14 GA GALV.
- Other:

FIRE RATING:
- NON
- 20 MIN
- 45 MIN
- 60 MIN
- 90 MIN
- 3 HR

MASONRY FRAMES:
- 5-3/4" (STANDARD)
- 6-3/4"
- 7-3/4"
- 8-3/4"
- OTHER:

DRYWALL FRAMES:
- 5 5/8" (4 5/8" throat)
- 5 7/8" (4 7/8" throat)
- 6 1/4" (5 1/4" throat)
- 7 1/4" (6 1/4" throat)
- 8 1/4" (7 1/4" throat)
- OTHER:

END

CONSTRUCTION:
- KNOCK DOWN
- WELDED 1 PIECE

REPLACEMENT? (Masonry Application)
- REPLACEMENT
- NEW CONSTRUCTION

END

ROUGH OPENINGS: DRYWALL = Add 2" to width & 1.5" to height EXAMPLE: A 36" x 80" DOOR = 38" x 81.5" R.O.
MASONRY = Add 4" to width & 2" to height EXAMPLE: A 36" x 80" DOOR = 40" x 82" R.O.

STEP 2 = DOOR - CIRCLE ONE OPTION IN EACH BOX

START

MATERIAL:
- Metal flush insulated (18ga)
- Metal flush insulated galv. (18ga)
- Metal 6 panel insulated (18ga)
- Flush OAK solid core
- Flush BIRCH solid core
- Other__ _____

FIRE R.:
- NON
- 20 MIN
- 45 MIN
- 60 MIN
- 90 MIN
- 3 HR

LITE KITS:
- NONE
- 1/2 light
- Full light
- 5" X 20"
- 10" X 10"
- Other:_____

GLASS:
- NONE
- 1/4" Tempered
- 1/4" Wire glass
- 1" Insulated
- 1" Grids in glass

Pre-Finish:
- Unfinished
- Stained
- Painted

END

STEP 3 = HARDWARE - FOLLOW THE OPTIONS THAT YOU NEED

START

HINGE FINISH:
- US26D Satin chrome
- US32D Stainless
- US3 Bright Brass
- USP Primed
- US10B Oil rubbed BZ
- Other:

PUSH/PULL HANDLES: (CIRCLE:YES) → **FINISH:** AL / US32D / US3/ Other:

LOCKSET: (LEVER)
- Entry / Office function
- Privacy function
- Passage function
- Classroom function
- Storeroom function
- Other:

DEADBOLT:
- NONE
- Thumb turn
- Key both sides
- Other:

FINISH:
- US26D
- US3
- US32D
- US10B
- Other:

CLOSER:
- NONE
- Standard
- Heavy Duty

PANIC BAR (EXIT DEVICE):
- Panic bar, no exterior trim (exit only)
- Panic bar, pull handle on outside
- Panic bar, lever on outside (circle: entry or passage)
- Panic bar, thumb latch on outside (circle: entry or passage)
- Other:


FINISH:
- Aluminum
- Dark bronze
- Stainless stl.
- US4/ US3
- Other:


WEATHERSTRIP, THRESHOLD, SWEEP
YES / NO

IF DOUBLE DOOR - (CIRCLE ONE IF A DOUBLE DOOR)
- Lock one leaf down with (circle one: flush bolts / surface bolts)
- Lock one leaf down with (circle one: flush bolts / surface bolts) & provide astragal
- Have panic/exit device on both leafs
- Other:

END

STEP 4 = HANDING

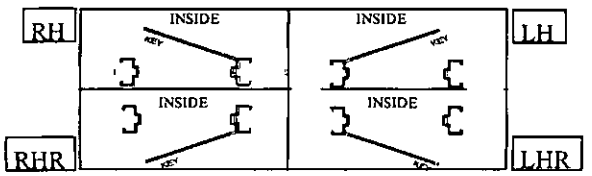

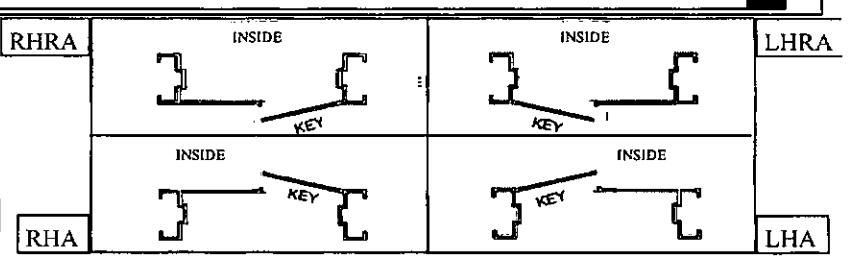


SLINGSHOT LLC
www.slingshotwholesale.com
PHONE: 304.375.2553 FAX: 304.375.2217

COMPANY: _____
CONTACT: _____
JOB NAME: _____
PHONE: _____
FAX: _____
E-MAIL: _____

Replacement Door Worksheet

Data Sheet: D10.3.1 | 3-2010

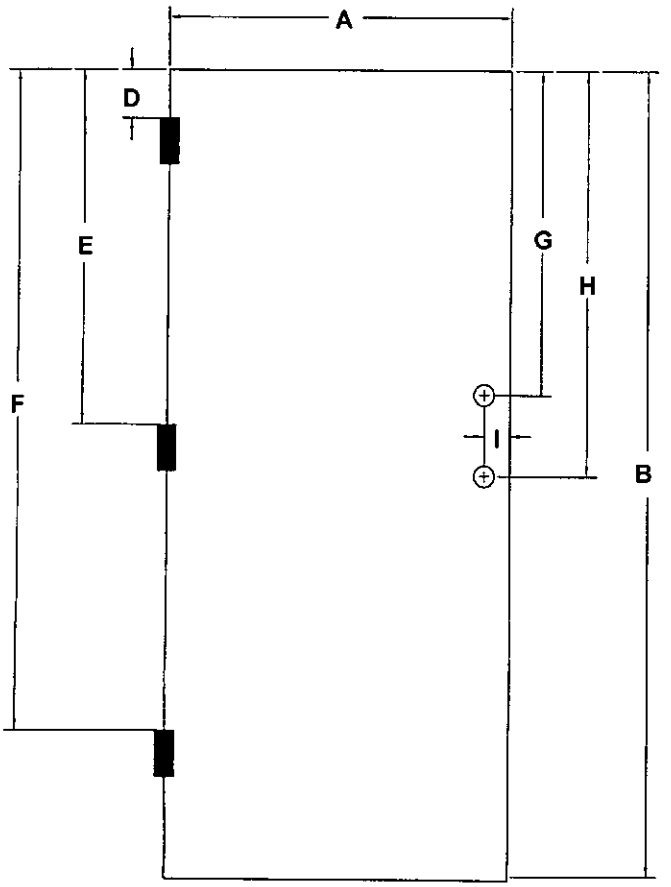

_____**A.** NET DOOR WIDTH
_____**B.** NET DOOR HEIGHT
_____**C.** DOOR THICKNESS
_____**D.** TOP OF DOOR TO TOP OF HINGE #1
_____**E.** TOP OF DOOR TO TOP OF HINGE #2
_____**F.** TOP OF DOOR TO TOP OF HINGE #3
_____**G.** TOP OF DOOR TO C/L OF DEAD BOLT
_____**H.** TOP OF DOOR TO C/L OF LOCK PREP
_____**I.** LOCK BACK SET
_____**J.** HINGE BACK SET
_____**K.** HINGE HEIGHT
_____**L.** DOOR HANDING

DOOR TYPE: ___INSULATED HOLLOW METAL, 18 GA.
___SOLID CORE FLUSH BIRCH
___SOLD CORE FLUSH OAK
___OTHER:_____

FIRE RATING: ___20, ___45, ___60, ___90, ___3hr

LITE KIT SIZE (VIEWABLE GLASS): ___ NO LITE KIT
___5" X 20" ___4" X 25" ___3" X 33" ___10" X 10"
___22" X 28" (1/2 LITE) ___22" X 58" (FULL LITE) 6'8" DOOR
___22" X 62" (FULL LITE) 7'0" DOOR
OTHER: _____

GLASS TYPE: ___1/4" CLEAR TEMP., ___1/4" CLEAR LAM.
___1" CLEAR INSULATED, ___1/4" TINTED, ___1/4" WIRE
___FIRE GLASS, OTHER: _____

ADDITIONAL DESCRIPTION/ SPECIAL HARDWARE PREP.
_____
_____
_____
_____

